



**ZUMA BOLLARDS**

DESIGNING SAFETY AND SECURITY



MODEL

**AUBURN**

TYPE

**LED**

SERIES

**BOLLARD**

**ZUMA LIGHTING LLC**

325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004

[INFO@ZUMALIGHTING.COM](mailto:INFO@ZUMALIGHTING.COM) • [\(310\) 975-3126](tel:(310)975-3126) • [ZUMALIGHTING.COM](http://ZUMALIGHTING.COM)

# ORDERING INFORMATION



<b>Model</b> AUBURN
<b>Type</b> LED
<b>Series</b> BOLLARD

FIXTURE	SIZE	SOURCE	VOLTS	LAMP / TEMP	COLOR	LENS	OPTIONS
AUB-B (LED)	10 (square) = 42" x 8" sq. 10R (round) = 42" x 8" dia. CH = Custom height, consult factory	10W 20W 30W 36W 40W	U = 120v-277v 8 = 480v	3K = 3000K = 90lm/w 35K = 3500K = 100lm/w 41K = 4100K = 110m/w 5K = 5000K = 120lm/w	DB = Dark Bronze BK = Black WH = White SL = Silver CC = Custom	CFA = Clear Frosted Acrylic WFA = White Frosted Acrylic	SP = Surge Protection D = 0-10V Dimming Driver MGF = Marine Grade Finish

# SPECIFICATIONS

## Housing

Housing available using extruded round or square tube with .080 aluminum roof cap with supports fabricated for maximum strength. Also available as column.

## LED

High efficiency, long-life surface mounted LED's mounted on MPCB aluminum boards. 100,000 hour lifespan based on IES LM-80 results and TM-21 calculations. 0-10V dimming driver for 120/277 volt, constant current, metal case, 5 year warranty.

## Lens

Lens is fabricated from premium acrylic. Specify clear frosted or white frosted lens.

## Mounting Options

Cast aluminum base plate secures to the housing. Mounting kit with anchor bolts, included.


## Finish

Thermoset polyester oven-baked powder coat, in Dark Bronze. Custom colors are available to your specification. Marine Grade Finish available upon request.

## Warranty

5-year warranty


## Dimensions



A	B	C	D
42"	10"	8"	8"

*\*Custom height available*

## Mounting

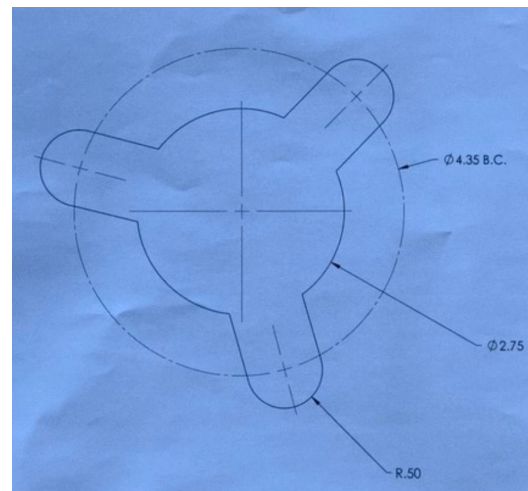

### Bollard Base:

Rugged cast aluminum. Completely concealed.

### Mounting:

Base mounts onto foundation with three (3) 3/8" x 12" galvanized anchor bolts on a 4.35 on center bolt circle. Bollard housing is secured to the base with stainless steel flat head, counter-sunk screws for a smooth, clean appearance.